

FHR 4.5SF ROTATOR

STATIC
LOAD



45 kN

DYNAMIC
LOAD



25 kN

TORQUE
at 25MPa



1200 Nm

OILFLOW



20 l/min

WEIGHT



29 kg



**FORGED
STEEL**

Rotate left/right

G3/8" Max 250 bar

Grapple open

G3/8" Max 200 bar

Rotator frame
L73 ø25

Fast maintenance
greasing nipple

Grapple close

G3/8"
Max 300 bar


Iron 4 point
fitting system
hose guard

Grapple open
G3/8"

Grapple close
G3/8"

Optional open/close
channels

Shock resistant FORGED
STEEL flange for reliable
fitting the grapple

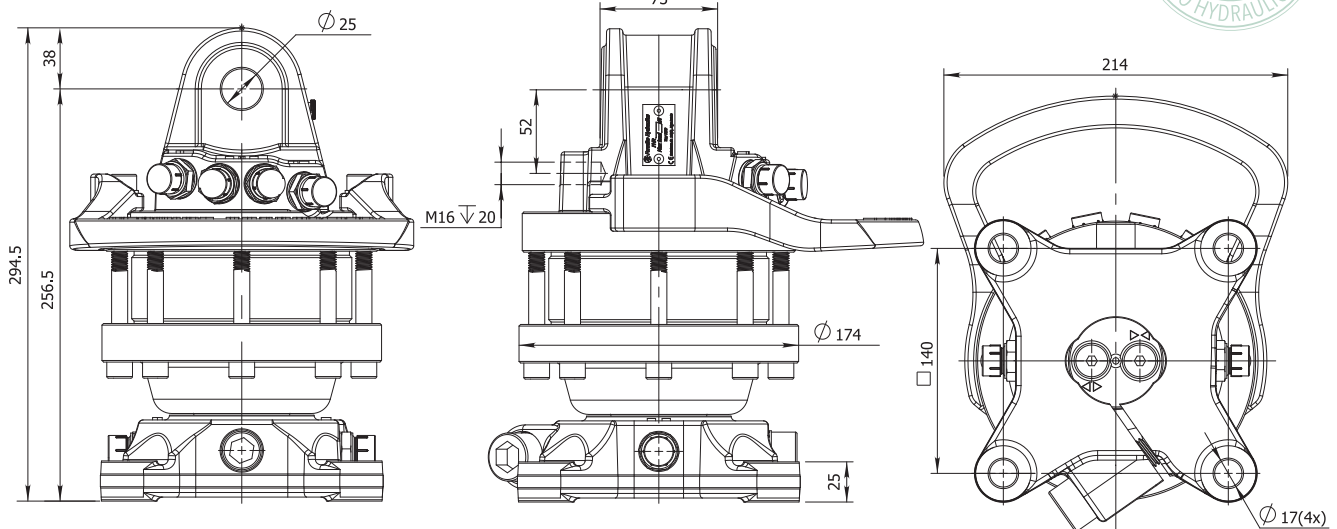

FORESTRY



AGRICULTURE



CONSTRUCTION



GENERAL CARGO



RECYCLING