


# Proportional directional valves type DHZE-A and DKZE-A

direct operated, without position transducer, ISO 4401 size 06 and 10

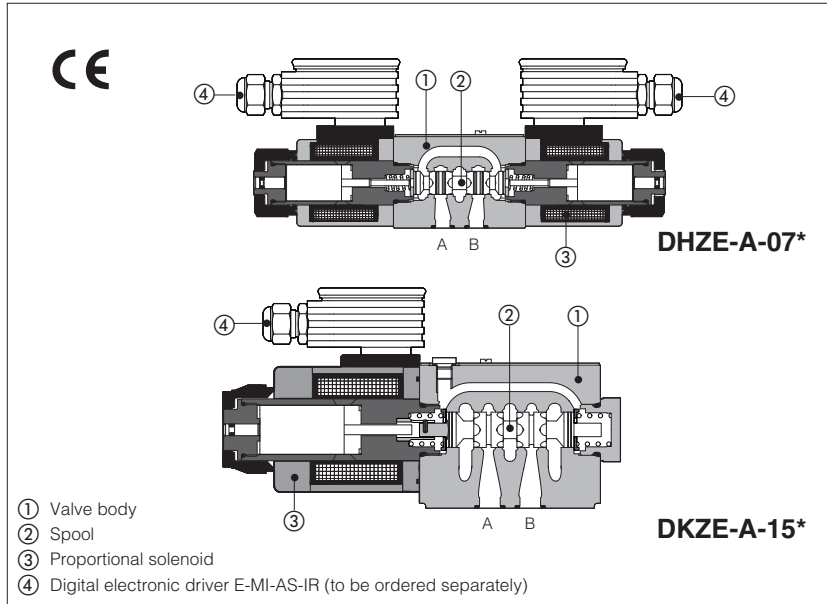

DHZE-A and DKZE-A are open-loop direct operated proportional valves with threaded type proportional solenoids, certified according to North American standard **cURus**.

They operate in association with electronic drivers, see section 2, which supply the proportional valves with proper current to align the valve regulation to the reference signal supplied to the electronic driver.

The spools are available with linear L, progressive S or differential D flow characteristics.

The valve body is 3 chambers type for DHZE and 5 chambers type for DKZE.

The solenoid coils are plastic encapsulated with insulation class H and they are available with different nominal resistances depending to the voltage supply (12 V<sub>DC</sub> or 24 V<sub>DC</sub>) and to the electronic driver type, see section 2 and 4.

**Mounting surface:**

**ISO 4401 sizes 06 and 10.**

**Max flow** with valve differential pressure p = 30 bar, see section 3

**50 l/min for DHZE - 105 l/min for DKZE**

**Max pressure = 350 bar for DHZE**

**315 bar for DKZE**

**1 MODEL CODE**

<b>DHZE</b>	-	<b>A</b>	-	<b>0</b>	<b>7</b>	<b>1</b>	-	<b>S</b>	<b>5</b>	/	*	-	*	/	*	/	**	/	*		
<p><b>DHZE</b> = size 06 <b>DKZE</b> = size 10</p>		<p><b>A</b> = without position transducer</p>		<p>Valve size <b>0</b> = ISO 4401 size 06 (DHZE) <b>1</b> = ISO 4401 size 10 (DKZE)</p>		<p>Configuration, see section 3 <b>5</b> = external plus central position, spring centered <b>7</b> = 3 position, spring centered</p>		<p>Spool overlapping in central position, see section 3 <b>1</b> = P, A, B, T positive overlapping (15% of spool stroke) <b>3</b> = P positive overlapping; (15% of spool stroke) A, B, T, negative overlapping</p>		<p>Spool type (regulating characteristics) <b>L</b> = linear; <b>S</b> = progressive; <b>D</b> = differential-progressive (as <b>S</b>, but with P-A= Q, P-B= Q/2)</p>		<p>Seals material, see section 2: - = NBR <b>PE</b> = FKM <b>BT</b> = HNBR</p>		<p>Series number</p>		<p><b>Coil option (only for -A execution)</b> see section 2 and 4: - = standard coil for 24V<sub>DC</sub> Atos drivers <b>6</b> = optional coil for 12V<sub>DC</sub> Atos drivers <b>18</b> = optional coil for 24V<sub>DC</sub> low current drivers</p>		<p>Coils with special connectors, see section 4 - = omit for standard DIN connector <b>J</b> = AMP Junior Timer connector <b>K</b> = Deutsch connector <b>S</b> = Lead Wire connection</p>		<p><b>Hydraulic options</b>, see section 3: <b>B</b> = solenoid side of port A (only for valve configuration 5) <b>MO</b> = horizontal hand lever <b>MV</b> = vertical hand lever <b>BMO</b> = horizontal hand lever installed at side of port A <b>BMV</b> = vertical hand lever installed at side of port A</p>	
<p>Spool size: <b>14, 1, 3, 5</b> = see section 3</p>																					

**2 ELECTRONIC DRIVERS FOR DHZE-A\***

Drivers model	E-MI-AC		E-MI-AS-IR		E-BM-AC		E-BM-AS-PS		E-ME-AC		E-RP-AC	
Type	analog		digital		analog		digital		analog		analog	
Voltage supply	12	24	12	24	12	24	12	24	24	12	24	
Coil option	/6	std	/6	std	/6	std	/6	std	std	/6	std	
Format	DIN 43650 plug-in to solenoid				DIN 43700 UNDECAL		DIN-rail panel		EUROCARD		Sealed and rugged box	
Data sheet	G010		G020		G025		G030		G035		G100	

**3 HYDRAULIC CHARACTERISTICS** (based on mineral oil ISO VG 46 at 50 °C)

Hydraulic symbols						
Valve model	DHZE				DKZE	
Spool overlapping	1, 3	1	1, 3	1, 3	1, 3	1, 3
Spool type and size (2)	L14	L1	S3, L3, D3	S5, L5, D5	S3, L3, D3	S5, L5, D5
Pressure limits [bar]	ports P, A, B = 350; T = 210				ports P, A, B = 315; T = 210	
Max flow (3) [l/min]						
at $\Delta p = 10$ bar (P-T)	1	4,5	17	28	45	60
at $\Delta p = 30$ bar (P-T)	2	8	30	50	80	105
at $\Delta p = 70$ bar (P-T)	3	12	45	70	120	160
Response time (4) [ms]	< 30				< 40	
Hysteresis [%]	$\leq 5\%$				$\leq 5\%$	
Repeatability	$\pm 1\%$				$\pm 1\%$	

- Notes:**
- Above performance data refer to valves coupled with Atos electronic drivers, see section 2.
  - The flow regulated by the directional proportional valves is not pressure compensated, thus it is affected by the load variations. To keep constant the regulated flow under different load conditions, modular pressure compensators are available (see tab. D150).

- (1) **Option /B** Solenoid at side of port A, only for valve configuration 5.  
 (2) **L** = linear flow characteristics  
**S** = progressive flow characteristics  
**D** = progressive flow characteristics with differential ratio P-A=Q; P-B = Q/2  
 (3) For different  $\Delta p$ , the max flow is in accordance to the diagrams in sections 7.2 and 8.2  
 (4) 0-100% step signal

**3.1 Auxiliary hand lever**

This option is available only for DHZE-A with spool type **S3, S5, D3, D5, L3, L5**. It allows to operate the valve in absence of electrical power supply. For detailed description of DHZE-A with hand lever option see table E138

- **Option /MO** horizontal hand lever
- **Option /MV** vertical hand lever
- **Option /BMO** horizontal hand lever installed at side of port A
- **Option /BMV** vertical hand lever installed at side of port A

**4 MAIN CHARACTERISTICS, SEALS AND HYDRAULIC FLUID** - for other fluids not included in below table, consult our technical office

Assembly position / location	Any position					
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)					
Ambient temperature	Standard execution = -30°C ÷ +70°C; /PE option = -20°C ÷ +70°C; /BT option = -40°C ÷ +70°C					
Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C					
Recommended viscosity	15 ÷ 100 mm <sup>2</sup> /s - max allowed range 2.8 ÷ 500 mm <sup>2</sup> /s					
Fluid contamination class	ISO 4406 class 21/19/16 NAS 1638 class 10, in line filters of 25 µm ( $\beta_{10} \geq 75$ recommended)					
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>		<b>Classification</b>		<b>Ref. Standard</b>	
Mineral oils	NBR, FKM, HNBR		HL, HLP, HLPD, HVLP, HVLPD		DIN 51524	
Flame resistant without water	FKM		HFDU, HFDR		ISO 12922	
Flame resistant with water	NBR, HNBR		HFC			
Flow direction	As shown in the symbols of table 3					
Coil code	DHZE-A*			DKZE-A*		
	standard	option /6 (1)	option /18 (2)	standard	option /6 (1)	option /18 (2)
Coil resistance R at 20°C	3 ÷ 3,3 Ω	2 ÷ 2,2 Ω	13 ÷ 13,4 Ω	3,8 ÷ 4,1 Ω	2,2 ÷ 2,4 Ω	12 ÷ 12,5 Ω
Max. solenoid current	2,2 A	2,75 A	1 A	2,6 A	3,25 A	1,2 A
Max. power	30 Watt			35 Watt		
Protection degree (CEI EN-60529)	IP65					
Duty factor	Continuous rating (ED=100%)					
Certification	cURus North American Standard					


- Notes:**
- (1) **Option /6** optional coil for Atos drivers with power supply 12 Vdc  
 (2) **Option /18** optional coil for electronic drivers not supplied by Atos, with power supply 24 Vdc and max current limited to 1,2 A

**5 GENERAL NOTES**

DHZE and DKZE proportional valves are CE marked according to the applicable Directives (e.g. Immunity/Emission EMC Directive and Low Voltage Directive). Installation, wirings and start-up procedures must be performed according to the general prescriptions shown in table F003 and in the installation notes supplied with relevant components. The electrical signals of the valve (e.g. monitor signals) must not be directly used to activate safety functions, like to switch-ON/OFF the machine's safety components, as prescribed by the European standards (Safety requirements of fluid technology systems and components-hydraulics, EN-982).

**6 CONNECTIONS**



SOLENOID POWER SUPPLY CONNECTOR	
PIN	Signal description
1	SUPPLY
2	SUPPLY
3	GND



**7 DIAGRAMS FOR DHZE** (based on mineral oil ISO VG 46 at 50 °C)

**7.1 Regulation diagrams**


- 1 = linear spool L14      3 = linear spool L3      5 = linear spool L5  
 2 = linear spool L1      4 = progressive spool S3, D3      6 = progressive spool S5, D5

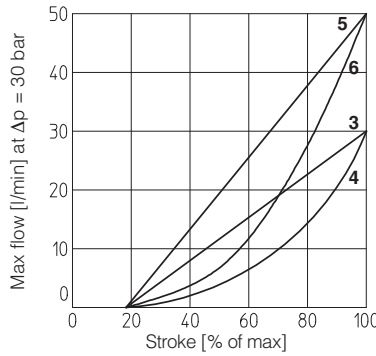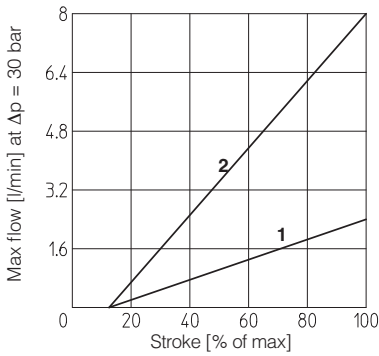

X = Threshold for bias activation depending to the valve type and amplifier type

**7.2 Operating limits**

- 7 = spool L14      9 = spool L3, S3, D3  
 8 = spool L1      10 = spool L5, S5, D5

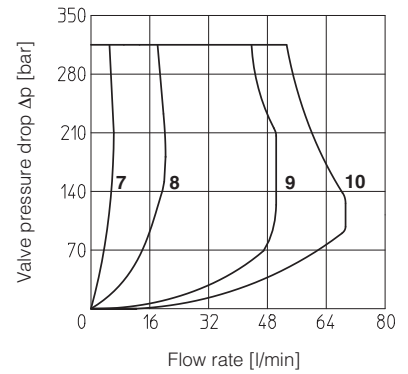

**Note:** hydraulic configuration vs reference signal for double solenoid valves (standard and option /B)

- Reference signal  $0 \div +10 \text{ V}$  } P → A / B → T  
 $12 \div 20 \text{ mA}$  }  
 Reference signal  $0 \div -10 \text{ V}$  } P → B / A → T  
 $4 \div 12 \text{ mA}$  }

Hydraulic configuration vs reference signal for single solenoid valves:

- Reference signal:  
 $0 \div +10 \text{ V}$  } P → A / B → T (standard)  
 $4 \div 20 \text{ mA}$  } P → B / A → T (option /B)



**8 DIAGRAMS FOR DKZE** (based on mineral oil ISO VG 46 at 50 °C)

**8.1 Regulation diagrams**

- 1 = linear spool L3  
 2 = progressive spool S3, D3  
 3 = linear spool L5  
 4 = progressive spool S5, D5

**8.2 Operating limits**

- 1 = spool L3, S3, D3  
 2 = spool L5, S5, D5

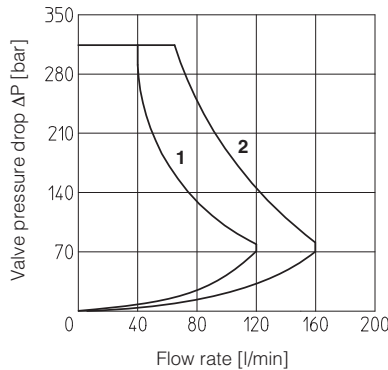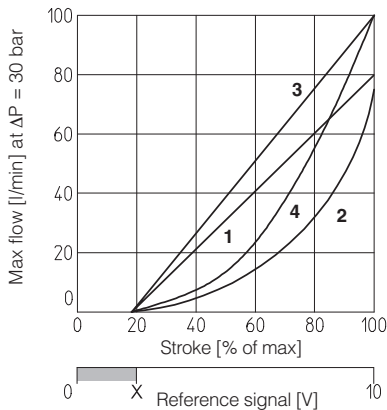


X = Threshold for bias activation depending to the valve type and amplifier type

**9 OPERATION AS THROTTLE VALVE**

Single solenoid valves (DHZE-A-051 - DKZE-A-151) can be used as simple throttle valves:  
 Pmax = 210 bar


Max flow Δp= 70bar [l/min]	SPOOL TYPE					
	L14	L1	L3	S3	L5	S5
<b>DHZE</b>	6	16	80		100	
<b>DKZE</b>	-	-	100			160



**10 COILS TYPE CAE WITH SPECIAL CONNECTORS**


**Options -J**

- Coil type COZEJ (DHZE)  
 Coil type CAZEJ (DKZE)  
 AMP Junior Timer connector  
 Protection degree IP67




**Options -K**

- Coil type COZEK (DHZE)  
 Coil type CAZEK (DKZE)  
 Deutsch connector, DT-04-2P male  
 Protection degree IP67



**Options -S**

- Coil type COZES (DHZE)  
 Coil type CAZES (DKZE)  
 Lead Wire connection  
 Cable length = 180 mm



11 INSTALLATION DIMENSIONS FOR DHZE and DKZE [mm]

ISO 4401: 2005


Mounting surface: 4401-03-02-0-05 (see table P005)

Fastening bolts: 4 socket head screws M5x30 class 12.9


Tightening torque = 8 Nm

Seals: 4 OR 108

Diameter of ports A, B, P, T:  $\varnothing$  7,5 mm (max)




DHZE-A-05




Mass: 1,5 kg

DHZE-A-07

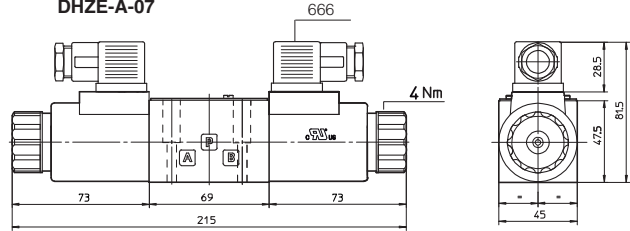


Mass: 2 kg

DHZE-A-05  
(with digital driver  
E-MI-AS-IR)

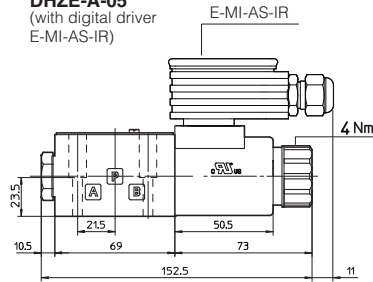

Mass: 1,95 kg

DHZE-A-07  
(with digital driver  
E-MI-AS-IR)

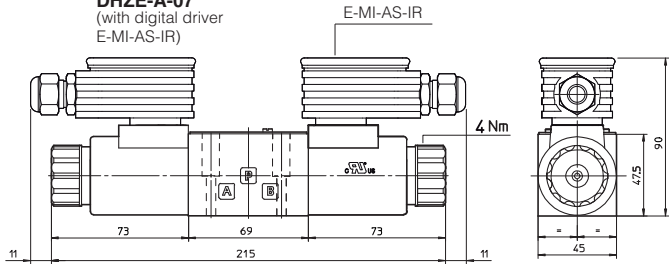

Mass: 3 kg

ISO 4401: 2005


Mounting surface: 4401-05-04-0-05 (see table P005)

Fastening bolts: 4 socket head screws M6x40 class 12.9


Tightening torque = 15 Nm

Seals: 5 OR 2050

Diameter of ports A, B, P, T:  $\varnothing$  11,2 mm (max)




DKZE-A-15

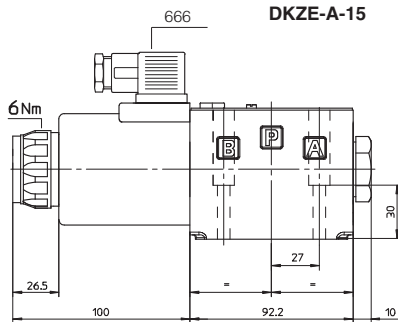


Mass: 4,5 kg

DKZE-A-17

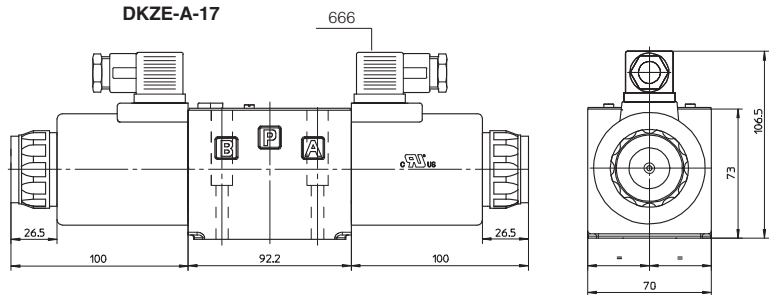


Mass: 6,1 kg

DKZE-A-15  
(with digital driver  
E-MI-AS-IR)

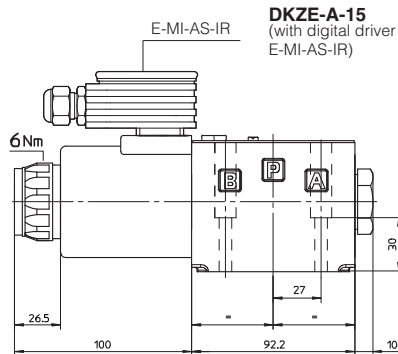

Mass: 4,95 kg

DKZE-A-17  
(with digital driver  
E-MI-AS-IR)

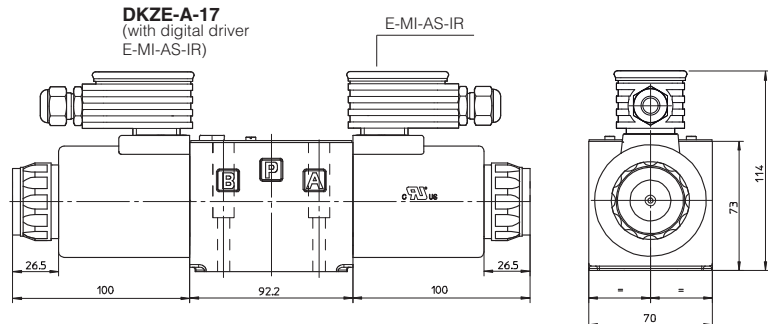

Mass: 7 kg

Note: for option /B the solenoid is at side of port A (only for DHZE-A-05 and DKZE-A-15)