


MAZ

## **Power Take Offs** Ref. TF19001P 236

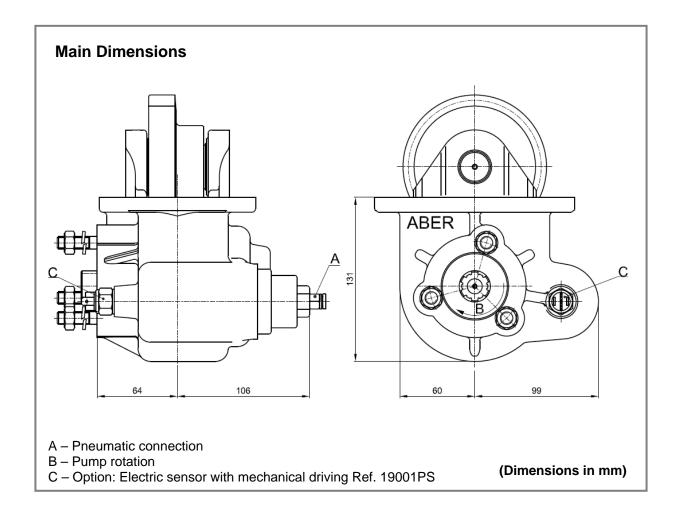

Main Data	
Continuous Torque (Nm)	320
Intermittent Torque (Nm)	400
Power (at 1000 r.p.m)	48 C.V. / 35 Kw
Mounting Position	Right
Pump Rotation	Left Hand
Weight (Kg)	9
Engine to PTO ratio	
Maz 236 1 : 0.900	

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material






## **Power Take Offs**

Ref. TF19002P

MAZ 236 ISO7653

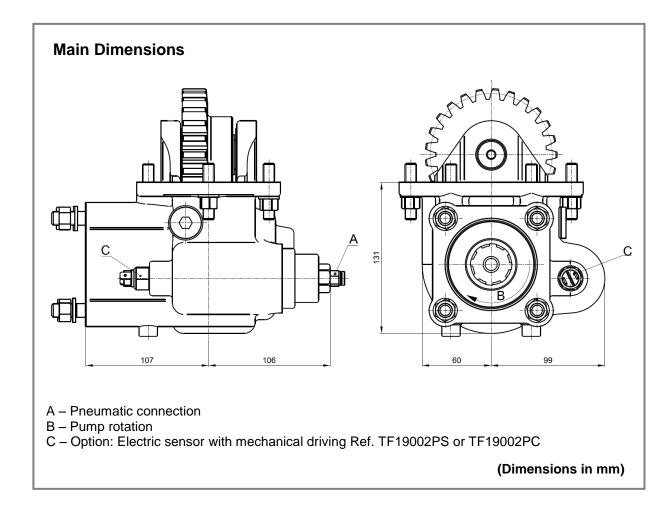

Main Data	
Continuous Torque (Nm)	320
Intermittent Torque (Nm)	400
Power (at 1000 r.p.m)	48 C.V. / 35 kW
Mounting Position	Right
Pump Rotation	Left Hand
Weight (Kg)	9
PTO internal ratio	1:1,32
Indicative ratio from motor to PTO's output	
Maz 236 1 : 0.900	

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown. The gear boxes are in constant change; therefore, ABER is not to be held responsible for any damage resulting from wrong application or application of outdated material

